

■ INTRODUCTION

Since technologies of the product have more and more advance, the products need comply with a requirement for more safe, convenient and low cost.

The float switches are extremely compact, simple and are easy to install on any small space. These switches are not effected by electrical interference. They can withstand to chemicals, high temperatures and pressures if the correct material of float switch is selected by the customers.


■ LIQUID PROPERTIES AND FLOATS

When the liquid specific gravity is less or more than the water, the float on the switch will either increase or decrease the immersion depth. The switch actuation level will also change.

All actuation levels are assumed with the water ($SG=1$). If your liquid has a different specific gravity, you should not specify the float specific gravity more than liquid, that will not cause the float rise with the liquid level. The reed switch inside the stationary stem will not be activated by the magnet inside the float.

If your liquid has a high viscosity, you should specify largest size float that will provide a greatest buoyant force to ensure the units operate normally.


Because the float switches are activated by the magnetic field of permanent magnet inside the float, make sure the liquid is no iron powder or magnetic material to avoid magnetic interference.

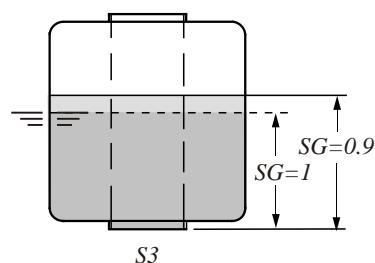

(Fig. 3)


■ PRINCIPLE

Fig. 1 illustrates the method of pivot actuation (such as the FCH TYPE float switches). When the magnetic field of permanent magnet inside the float is moved into to the proximity of the reed switch inside the stationary stem, the reed switch "snaps" the contact together and closes the electrical circuit. When the magnetic field is moved away from the reed switch, the reed switch does not touch. The circuit is open.

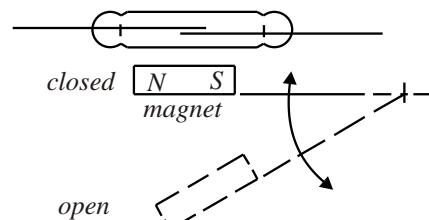

(Fig. 1)

Fig. 2 illustrates the method of perpendicular actuation (such as the FC V TYPE float switches). When the magnetic field of ring magnet inside the float is moved into the proximity of reed switch inside the stationary stem, the reed switch "snaps" the contact together and closes the electrical circuit. When the magnetic field is moved away from the reed switch, the reed switch does not touch. The circuit is open.

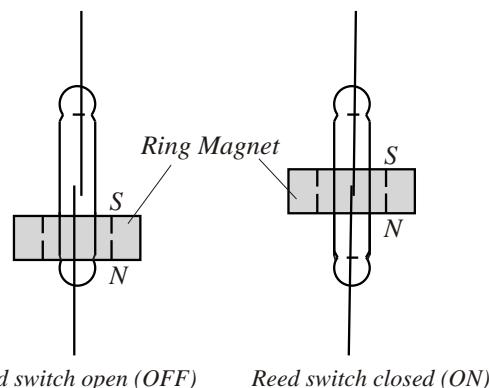

(Fig. 2)

CHEMICAL RESISTANCE

● Excellent ○ Good △ Fair × Corroded

Chemical	Concentration %	Temp °C °F	Plastic			Rubber			Stainless		
			PVC	PP	PVDF	PTFE	NBR	304	304	316	
Ammonia Water NH ₄ OH	10 10	40 104 80 176	● ● ● ○	● ● ● ○	● ● ● ○	● ● ● ○	○				
Aque Regia 3HCl+HNO ₃	10 10	40 104 80 176	△ △ ○	● ● ○	● ● ○	● ● ○	● ● ○				
Benzene C ₆ H ₆	Pure 80	40 104 176	× △ ○	○	●	●	●				
Bleaching Liquor Ca(ClO) ₂	5 5 20 20	40 104 80 176 40 104 80 176	●	●	●	●	●				
Boric Acid H ₃ BO ₃	Satu 80	40 104 176	● ● ○	● ● ○	● ● ○	● ● ○	● ○				
Brine		40 104 80 176	● ● ○	● ● ○	● ● ○	● ● ○	●				
Butadiene CH ₂ =CH-CH=CH ₂	Gas 80	40 104 176	●	●	●	●	●				
Butane CH(CH ₃) ₂	Gas 80	40 104 176	●	●	●	●	●				
Nitric Acid HNO ₃	10 10 30 30 50 50 70 70 98 98	40 104 80 176 40 104 80 176 40 104 80 176 40 104 80 176 40 104 80 176	● ● ○	● ● ○	● ● ○	● ● ○	● ● ○	● ● ○	● ● ○	● ● ○	
Oxalic Acid HOOC-COOH	20 20 50 50	40 104 80 176 40 104 80 176	● ● ○	● ● ○	● ● ○	● ● ○	● ○	△			
Phosphoric Acid H ₃ PO ₄	10 10 50 50 80 80	40 104 80 176 40 104 80 176 40 104 80 176	● ● ○	● ● ○	● ● ○	● ● ○	● ● ○	● ● ○	● ● ○	● ● ○	
Sodium Hydroxide NaOH	15 15 30 30 50 50 70 70	40 104 80 176 40 104 80 176 40 104 80 176 40 104 80 176	● ● ○	○ △	● ○	△	×	×	×	×	

Chemical	Concentration %	Temp °C °F	Plastic			Rubber			Stainless			
			PVC	PP	PVDF	PTFE	NBR	304	304	316		
Sodium Hypochlorite	3 3	40 104 80 176	● ○	● ○	● ○	● ○	● ○		△ ○			
NaClO	5 5 7 7 10 10 13 13	40 104 80 176 40 104 80 176 40 104 80 176 40 104 80 176	● ○	● ○	● ○	● ○	● ○		△ ○			
Sulfuric Acid H ₂ SO ₄	10 10 30 30 50 50 60 60 70 70 80 80 90 90 98 98	40 104 80 176 40 104 80 176	● ● ○	● ● ○	● ● ○	● ● ○	● ● ○	● ● ○	● ● ○	● ● ○	● ● ○	
Toluene C ₆ H ₅ CH ₃		40 104 80 176		△ △	●							
Chlorine Gas Cl ₂	Wet Wet Dry Dry	40 104 80 176 40 104 80 176	○	●	●	△	●	●	●	●		
Chromic Acid H ₂ CrO ₄	10 10 20 20 40 40 50 50	40 104 80 176 40 104 80 176 40 104 80 176 40 104 80 176	●	●	●	△	●	●	●	●		
Hydrochloric Acid HCl	15 15 25 25 35 35 38 38	40 104 80 176 40 104 80 176 40 104 80 176 40 104 80 176	● ● ○	● ● ○	● ● ○	● ● ○	● ● ○	● ● ○	○	○		

● Excellent ○ Good △ Fair × Corroded

Chemical	Concentration %	Temp °C °F	Plastic			Rubber		Stainless	
			PVC	PP	PVDF	PTFE	NBR	304	316
Citric Acid <chem>C6H8O7</chem>	10	40 104	●	●	●	●	●	●	●
	10	80 176	○	●	●	●	●		
Gasoline	10	40 104	●		●	●			
	10	80 176		●	●				
Diesel Fuels		40 104		●	●		●	●	●
		80 176		●	●		●	●	●
Ethyl Alcohol <chem>C2H5OH</chem>	Pure	40 104	●	●	●	●	●	○	○
		80 176	○	●	●	●	○		
Formic Acid <chem>HCOOH</chem>	90	40 104	○	○	●	●			
		80 176		●	●				
Hydrofluoric Acid	Dilute	40 104	●	○	●	●			
		80 176	○	●	●	●			
HF	30	40 104	○	○	●	●			
	30	80 176	×	○	●	●			
	40	40 104	△	○	●	●			
	40	80 176	○	●	●	●			
	50	40 104	△	○	●	●			
	50	80 176	○	●	●	●			
Hydrogen peroxide <chem>H2O2</chem>	5	40 104	●	●	●	●		○	●
	5	80 176	○	●	●	●			
	20	40 104	●	●	●	●			
	20	80 176	○	●	●	●			
	30	40 104	○	○	●	●			
	30	80 176	△	●	●	●			
	50	40 104	△	×	●	●			
	50	80 176		●	●	●			
	90	40 104		●	●	●			
	90	80 176		●	●	●			
Isopropyl Alcohol <chem>(CH3)2CHOH</chem>	Pure	40 104	●	●	●	●	○		
		80 176		●	●	●			
Kerosene		40 104	●	○	●	●			
		80 176		●	●	●			
Methyl Alcohol <chem>CH3OH</chem>		40 104	○	●	●	●	△		
		80 176	○	●	●	●			
Methyl Ethyl Ketone <chem>CH3COCH2CH3</chem>		40 104	△		●				
		80 176			●				
Potassium Chromate <chem>KCrO4</chem>		40 104	●	●	●	●	●		
		80 176	○	●	●	●	○		

REED SWITCH PROTECTION

■ INDUCTIVE LOADS

When using reed switches for inductive loads such as motors, relay coil, solenoids, etc., the contacts will be subjected to high induced voltages during opening of the contacts (load circuit). Such high induced voltages (transients) may cause damage to the reed switch or significantly reduce its life.

Therefore, protective circuits such as: RC (snubber), varistor or clamping diodes are recommended. (see Fig. 4a, Fig. 4b, Fig. 4c)

- It is prohibited to drive directly solenoid valve, motor or magnetic switch.

$$C = \frac{I^2}{10} \text{ (uF)}$$

$$R = \frac{E}{10I(1 + \frac{E}{50})}$$

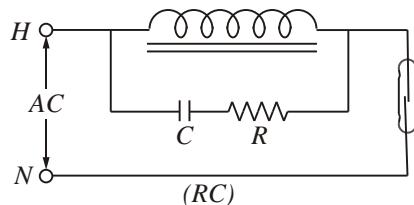


Fig. 4 (a)

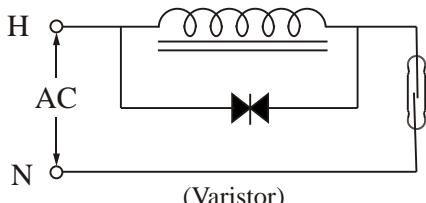


Fig. 4 (b)

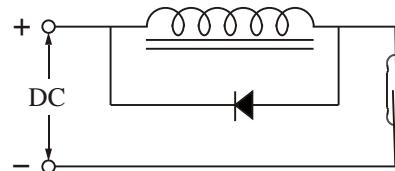


Fig. 4 (c)

■ CAPACITIVE LOADS

When using reed switches for capacitive loads such as capacitors, incandescent lamps or long cables, the contacts will be subjects to high surge (inrush) current.

Therefore, protective circuits such as: surge suppressors or current limiting resistors are recommended. (Fig. 5a, Fig. 5b)

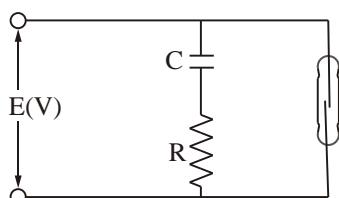


Fig. 5 (a)

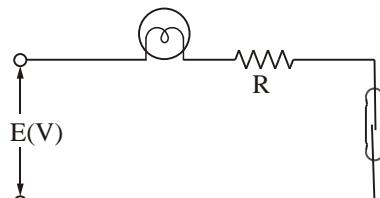


Fig. 5 (b)

FLOAT SPECIFICATIONS

MODEL	TYPE	$\phi A \times B \times \phi C$	S.G.	Max. Pressure (kg/cm ²)	Weight (g)	Material/Color	Max. Temp. (°C)
	S1	28 × 28 × 9.5	E>0.7	10	8	SUS 316	200
	S3	45 × 55 × 15	E>0.65	12	37.6	SUS 316	200
	S6	75 × 108 × 20	E>0.5	10	165	SUS 304	200
	S2	41 × 38 × 11	E>0.7	35	19.5	SUS 316	200
	S4	52 × 52 × 15	E>0.55	30	33.4	SUS 316	200
	S5	75 × 73 × 19	E>0.65	30	102.4	SUS 304	200
	S7	30 × 28 × 9.5	E>0.82	30	8	SUS 316	200
	S8	100 × 100 × 20	E>0.5	30	249.7	SUS 304	200
	S9	150 × 150 × 30	E>0.45	30	534	SUS 304	200
	S11	28 × 32 × 9.5	E>0.82	30	8.1	SUS 304	200
	P1	25 × 15 × 10	E>0.65	4	3.5	PP / white black	80
<p>(Hollow)</p>	P2	25 × 25 × 10	E>0.55	4	5	PP / white black	80
	P3	48 × 45 × 18.5	E>0.6	5	35.5	PP / black	80
	P4	20 × 25 × 10	E>0.7	4	3.7	PP / black	80
	P5	20 × 20 × 8.1	E>0.75	4	4	PP / black	80
	P8	18.2 × 15.3 × 7.2	E>0.8	4	1.82	PP / black	80
	Q6	20 × 20 × 7.5	E>0.75	ATM	3.5	PP / white	80
<p>(Foam)</p>	Q7	25 × 25 × 10	E>0.7	ATM	6.7	PP / white	80
	N1	25 × 15 × 10	E>0.5	ATM	2.7	NBR / black	100
	N2	18.5 × 26 × 10	E>0.7	ATM	3.3	NBR / black	100
	N3	19 × 20 × 10	E>0.55	ATM	2.4	NBR / black	100
	N4	17.5 × 25 × 10	E>0.65	ATM	2.5	NBR / black	100
	N5	30 × 45 × 12.8	E>0.5	ATM	11.5	NBR / black	100
	F2	42 × 44 × 14	E>0.63	5	18.5	PP	80
<p>(Hollow)</p>	F3	45 × 45 × 20	E>0.65	5	35.7	PP	80
	F4	48 × 60 × 18	E>0.75	5	65.3	PVDF	120

METAL SINGLE SWITCH TYPES





► FD MH16



► FD MH16A
(MH16R+Adapter)





► FD MH16C

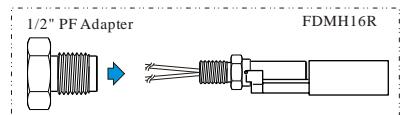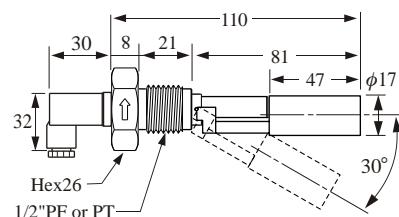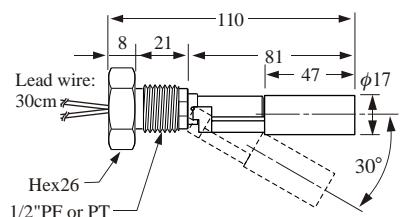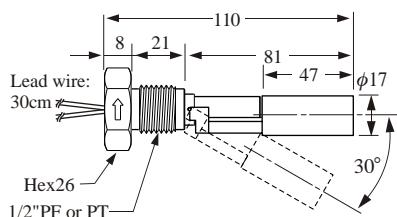

► FD MH16D



► FD MH16R

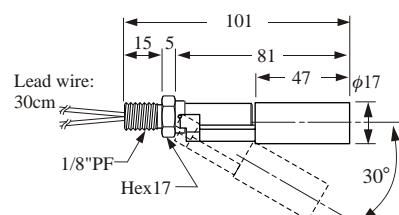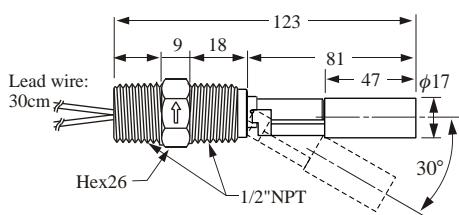

■ SPECIFICATIONS

Type	Material	Switching Capacity Max.	Switching Voltage Max.	Switching Current Max.	Carry Current Max.	Lead Wire	Max. Pressure	Operating Temp.	Suitable Sp. Gr.
FDMH16 A/C/D/R	SUS 304	50W/SPST	240Vac 200Vdc	0.5A	1A	XLPE or TEFLO	5 kg/cm ²	-20~120°C (Max.200°C)	FDMH16:0.92 FDMH26:0.75

METAL SINGLE SWITCH TYPES




► FD MH50/ 56



► FD MH50A /56A



► FD MH50C /56C

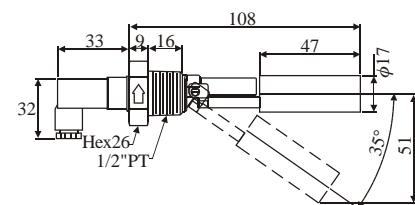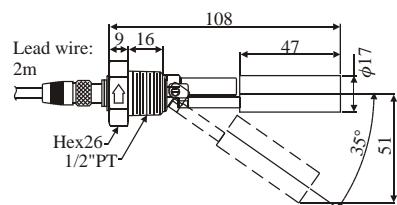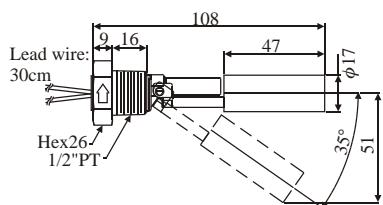




► FD MH60/ 66



► FD MH60A/ 66A



► FD MH60C/ 66C

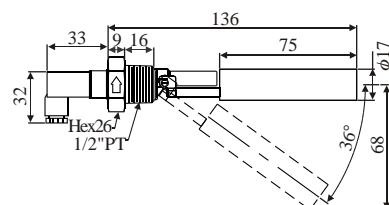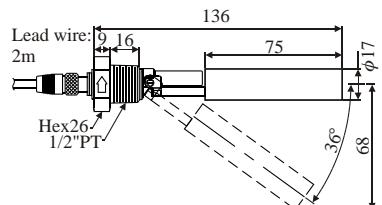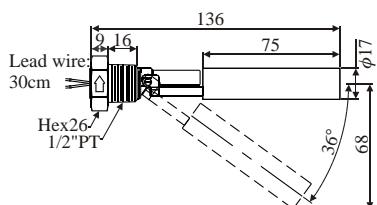

■ SPECIFICATIONS

Type	Material	Switching Capacity Max.	Switching Voltage Max.	Switching Current Max.	Carry Current Max.	Lead Wire	Max. Pressure	Operating Temp.	Suitable Sp. Gr.
FDMH50	SUS 304	50W/SPST	240Vac 200Vdc	0.5A	1A	XLPE or TEFLON	5 kg/cm ²	-20~120°C (Max.200°C)	FDMH5:0.92
FDMH56	SUS 316								FDMH6:0.75

ORDER INFORMATION FOR METAL SIDE MOUNTING FLOAT SWITCH

FDMH **16 (CR)(10 F)**

Type _____

FDMH16 Float : $\phi 17 \times 47$

Connection _____

—: 1/2" Screw

Q: PT Screw

A: 1/8" PF+1/2" Adaptor

R: PF Screw

C: 1/2" PF+DIN Connector

T: BSP Screw

D: 1/2" Dual Screws

U: NPT Screw

R: 1/8" Screw

Lead wire Length (Unit=10cm) _____

05: 50cm (01~50)

※ 50cm per Unit

10: 100cm (51~100)

※ 30cm (Standard length)

15: 150cm (101~150)

⋮

Material of Lead wire _____

F: SILICON (200°C) AWG24 X $\phi 4$

T: TEFLON (200°C) AWG24

X: XLPE (125°C) AWG22 (Standard)

※ Material of Wetted parts "SUS304".

FDMH 50 A BR (05 F)

Type _____

5: $\phi 17 \times 47L$, 6: $\phi 17 \times 75L$

Material _____

0: SUS304, 6: SUS316L

Connection _____

—: without, A: ASI, C: DIN

Connecting Type _____

BR: 1/2"PF, BQ: 1/2"PT, BU: 1/2"NPT, BT: 1/2"BSP

Lead wire Length (Unit=10cm) _____

05: 50cm (01~50)

※ 50cm per Unit

10: 100cm (51~100)

※ 30cm (Standard length)

15: 150cm (101~150)

⋮

Material of Lead wire _____

F: SILICON (200°C) AWG24 X $\phi 4$

T: TEFLON (200°C) AWG24

X: XLPE (125°C) AWG22 (Standard)


※ Material of Wetted parts "SUS304".

PLASTIC OH TYPES



► FC H41PD / H51PD



■ Installation / N.C. / N.O. Action Position


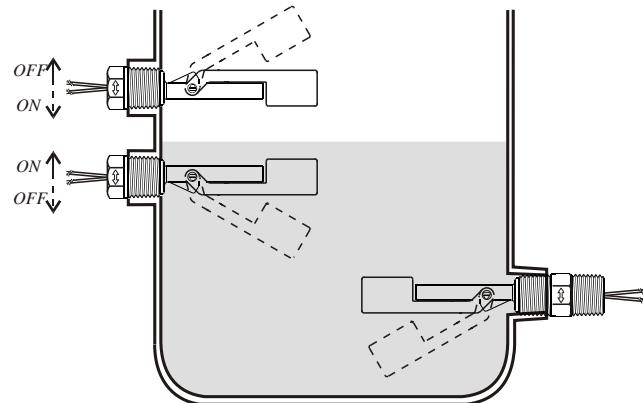


■ FC H41PD

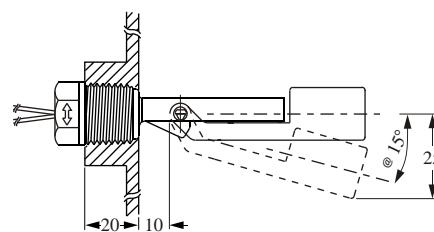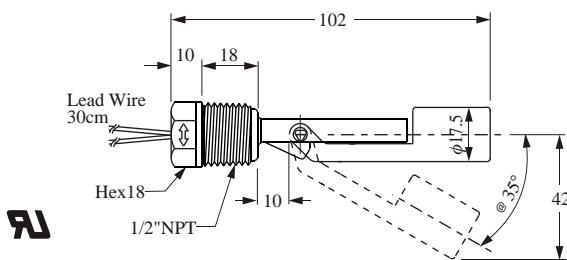


N.O. function, i.e. the contact closes when the liquid level rises.

■ FC H51PD

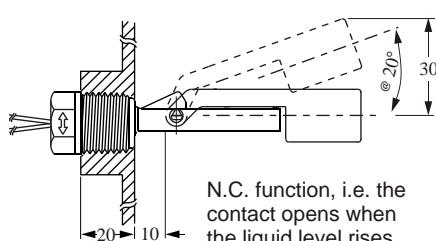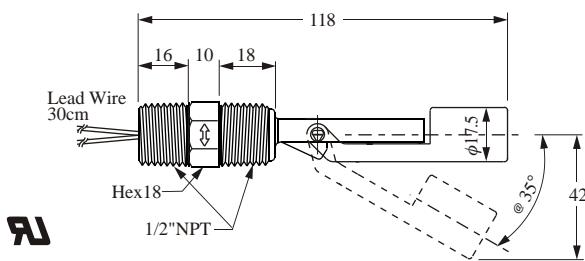

N.C. function, i.e. the contact opens when the liquid level rises.

■ FC H61PD

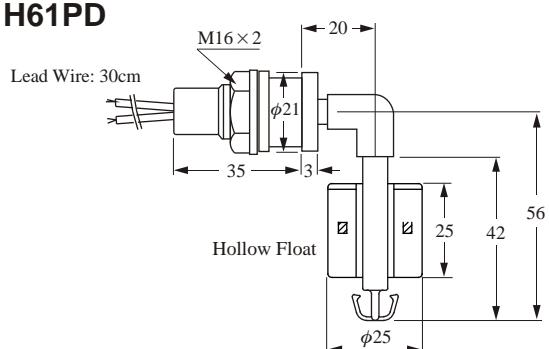

■ SPECIFICATIONS


Type	Material	Switching Capacity Max.	Switching Voltage Max.	Switching Current Max.	Carry Current Max.	Lead Wire	Max. Pressure	Operating Temp.	Suitable Sp. Gr.	Weight
FCH41PD	PP	50W/SPST	240Vac 200Vdc	0.5A	1A	XLPE	4 kg/cm ²	-20~80°C	0.65	20g
FCH51PD									0.65	25g
FCH61PD									0.7	31g

PLASTIC OH TYPES


► FC H21PD / H31PD




■ Optional
FC H21PDO(Round)

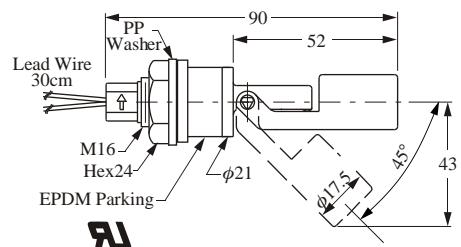

■ Standard
FC H21PDD (Hexagon)

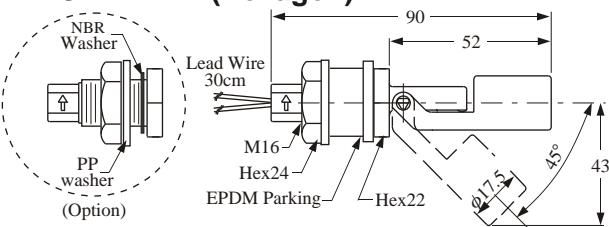


■ FC H31PD

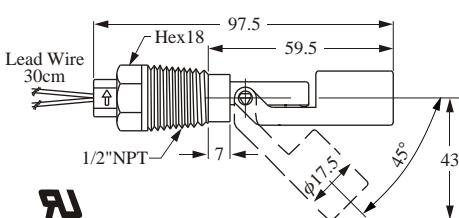


- For models FCH2 and FCH3, three different types of material are available PP, Nylon, and PVDF.
- The special lead wire or cable can be supplied according to the requirement of the customer.
- The customer can select the type of reed switch which their requires.
- For specifications of the standard design see catalog (page 10).
- OEM customers are welcome.

■ Installation / N.C. / N.O. Action Position


[External mounting]

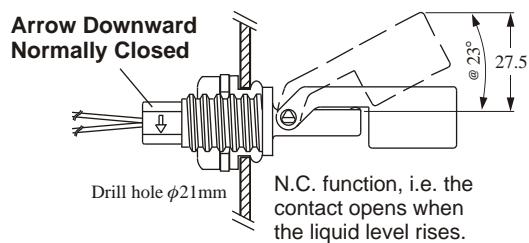

[Internal mounting]


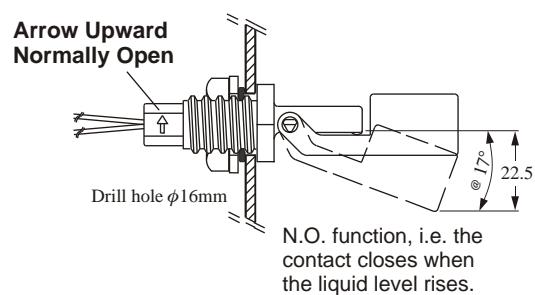


[External mounting]

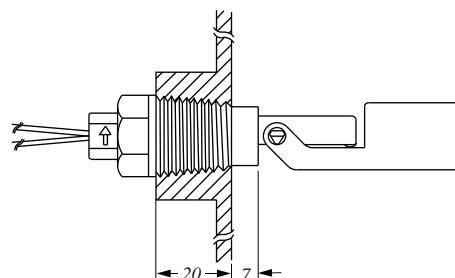


PLASTIC OH TYPES

► FCH11QD

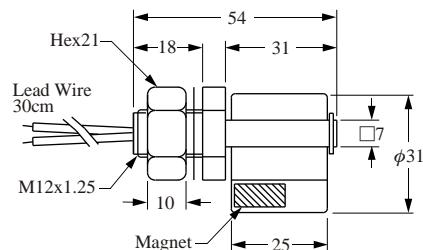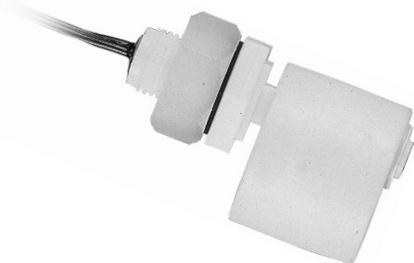


Washer: NBR


■ Installation / N.C./ N.O. Action Position

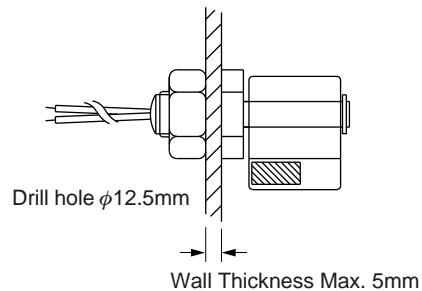

Normally open
N.O.

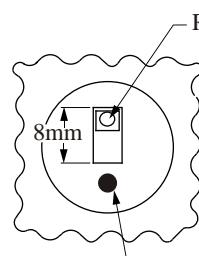

Normally closed
N.C.

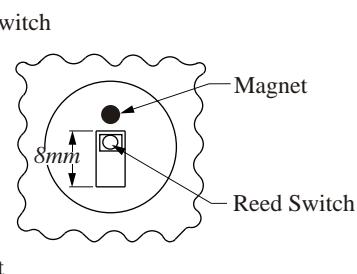

- All the products in this range come with the UL E161587 approval.
- All the products in this range are designed to be mounted on the side.
- For the specific gravity of water is used as a reference point in calculating specific gravity.

■ SPECIFICATIONS

Description \ Type	FCH11QD	FCH21PD FCH31PD	FCH23FD FCH33FD	FCH24YD FCH34YD	FCH25GD FCH35GD
Switching Capacity Max.	50W SPST				
Switching Voltage Max.	240VAC / 200Vdc				
Switching Current Max. (A)	0.5A				
Carry Current Max. (A)	1A				
Lead Wire	PVC AWG22	XLPE AWG22			
Max. Pressure (Kg/cm²)	ATM	4 kg/cm ²	2 kg/cm ²		
Operating Temperature	-20~80°C		-20~120°C		
Material	PP		PVDF	Nylon	Polysuphone
Suitable Specific Gravity	0.78	0.75	0.85	0.8	0.85
Weight	25 g	H21: 22 g H31: 21 g	25 g	23 g	25.4 g

PLASTIC OV TYPES

► FC V11QF







► FC V21QD



► FC V31PD



► FC V33FD, 34YD, 35GD

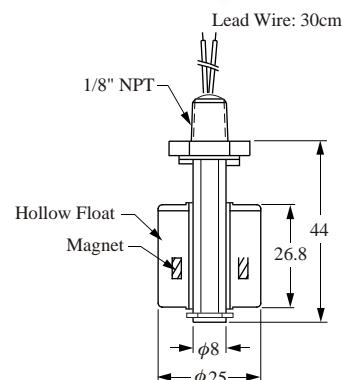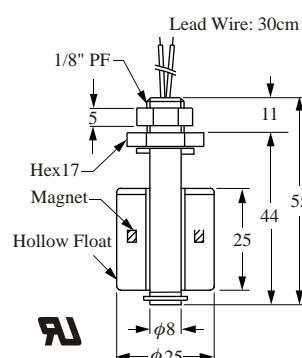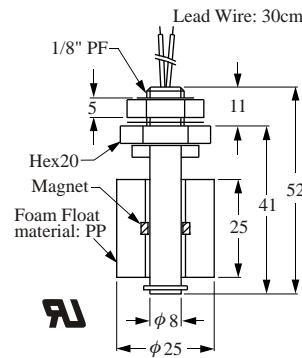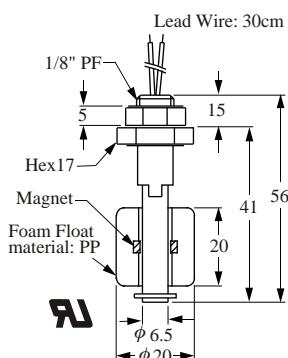

Washer: NBR

Drill hole $\phi 10\text{mm}$

Washer: NBR

Drill hole $\phi 10\text{mm}$

O-ring: VITON

Drill hole $\phi 10\text{mm}$

O-Ring: VITON


Drill hole $\phi 10\text{mm}$

■ SPECIFICATIONS

Description	Type	FC V11QF	FC V21QD	FC V31PD	FC V33FD	FC V34YD	FC V35GD
Switching Capacity Max.	10W SPST	50W SPST			50W SPST		
Switching Voltage Max.	125Vac	240Vac / 200Vdc			240Vac / 200Vdc		
Switching Current Max. (A)		0.5A			0.5A		
Carry Current Max. (A)		1A			1A		
Lead Wire	UL 1007 AWG22 PVC		UL 1007 AWG22 PVC			XLPE AWG22	
Reversible Switch Action		YES			YES		
Max. Pressure (Kg/cm²)		ATM		4 kg/cm ²		2 kg/cm ²	
Operating Temperature		-20~80°C		-20~80°C		-20~120°C	
Material		PP		PP	PVDF	Nylon	Polysuhpone
Suitable Specific Gravity		0.8		0.7	0.85	0.8	0.75
Weight (g)	12 g	18 g	12.8 g	18 g	15 g	18 g	

PLASTIC OV TYPES

► FC V11NF

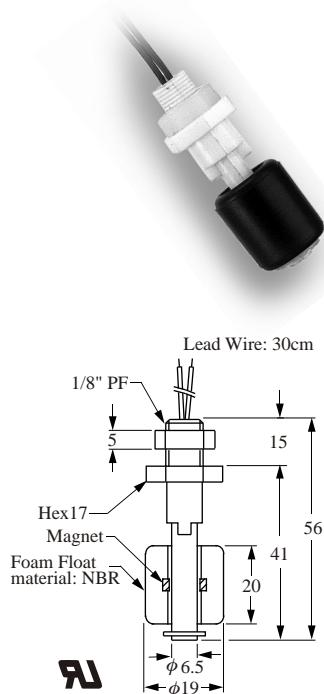


Washer: NBR
Drill hole $\phi 10$ mm

► FC V81PD



Washer: NBR
Drill hole $\phi 16$ mm

► FC V41PD, V41QD

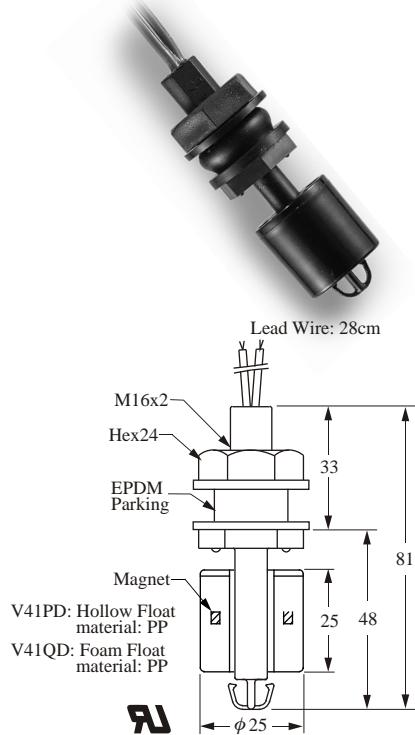


Washer: NBR
Drill hole $\phi 16$ mm

► FC V41ND



Washer: NBR
Drill hole $\phi 16$ mm

► FC V61PF, V61NF

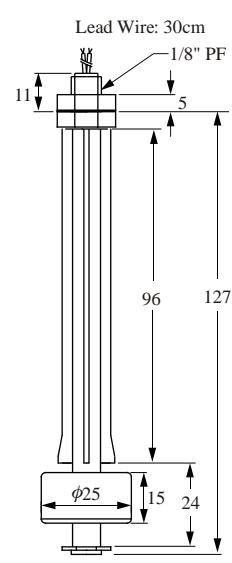


V61PF: Hollow Float
Material: PP
V61NF: Foam Float
Material: NBR



Washer: NBR
Drill hole $\phi 10$ mm

► FC V51PD

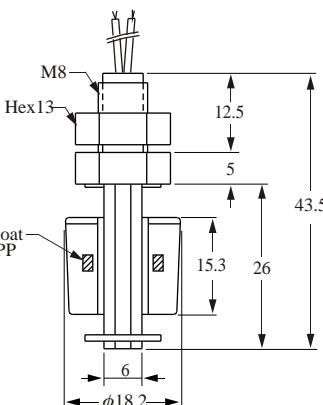


O-Ring: VITON
Drill hole $\phi 8.5$ mm

PLASTIC OV TYPES

■ SPECIFICATIONS

Type Description	FC V11NF	FC V61PF FC V61NF	FC V41PD FC V41QD	FC V81PD	FC V41ND	FC V51PD
Switching Capacity Max.	10W SPST	50W SPST				
Switching Voltage Max.	125Vac (Break Down 250Vac)	240Vac / 200Vdc				
Switching Current Max. (A)	0.5A					
Carry Current Max. (A)	1A					
Lead Wire	XLPE AWG22	UL 1007 AWG22 PVC				
Reversible Switch Action	NO	NO	YES	NO	NO	NO
Max. Pressure (kg/cm²)	ATM	V61P: 4kg/cm ² V61N: ATM	V41P: 4kg/cm ² V41Q: ATM	4 kg/cm ²	ATM	4 kg/cm ²
Operating Temperature	-20 ~100°C	-20~80°C			-20 ~100°C	
Material	PP (except V11N, V61N, V41N: NBR float)					
Suitable Specific Gravity	0.8	0.65 0.5	0.55 0.7	0.6	0.8	0.8
Weight (g)	11 g	16 g	23 g	180 g	17 g	8.2 g

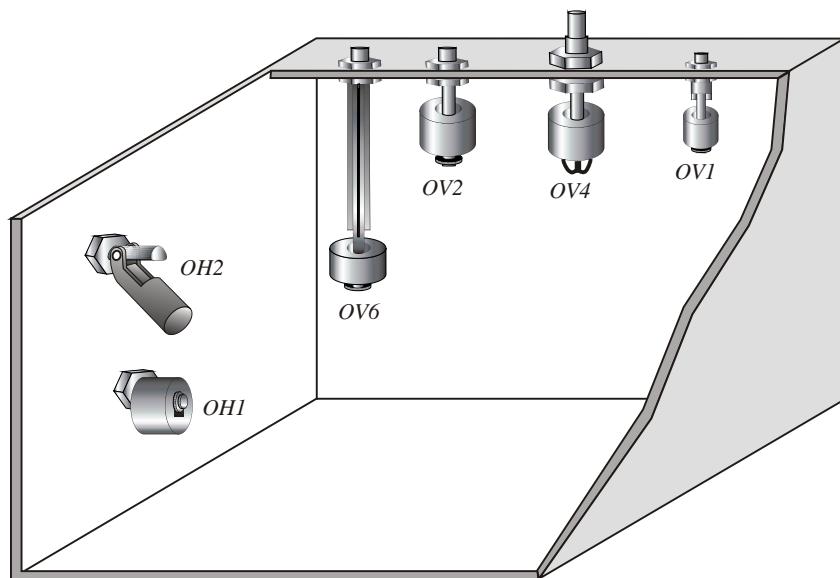

ORDER INFORMATION FOR PLASTIC OH/OV TYPES

FC **V2** **3** **F** **D** **A** (**05**) **P**)

Order No./ Model _____

FC H1~H6: RF-OH Side Mounting

FC V1~V9: RF-OV Top or bottom Mounting

Material of Wetted parts _____

1 : PP **5 :** Polysuphone

3 : PVDF **6 :** PPS

4 : Nylon

Material of Float _____

F :PVDF **P:PP (hollow)** **K:PPS**

N:NBR **Q:PP (foam)**

G:Polysuphone **Y: Nylon**

(Unsuitable for use in water application for long term)

Switching Capacity Max. _____

D:50W 240Vac /200Vdc SPST 

F :10W 125Vac SPST

K :20W 150Vac/200Vdc SPDT

Contact Form _____

A: Normally Open (N.O.) SPST

B: Normally Close (N.C.) SPST

C: 1AB SPDT

D: NC Reversible

E: NO Reversible

Lead wire Length (Unit=10cm) _____

05: 50cm (01~50) ※ 50cm per Unit

10: 100cm (51~100) ※ 30cm (Standard length)

15: 150cm (101~150)

⋮

Material of Lead wire _____

B: PVC (80°C) ---- AWG24

C: PVC cable (80°C) ---- AWG22 X φ4

D: XLPVC (105°C) ---- AWG24

F: SILICON cable (200°C) ---- AWG24X φ4

P: PVC (80°C) ---- AWG22

T: TEFLON (200°C) ---- AWG24


X: XLPE (125°C) ---- AWG22

S: Others


※ "A" (Normal Open) contact form is our standard specified switch activation, others contact form and target lead wire length subject to above data, except of above, please refer pages 7, 8, 10, 11and 13.

PLASTIC SPECIAL TYPES


► FC PV1

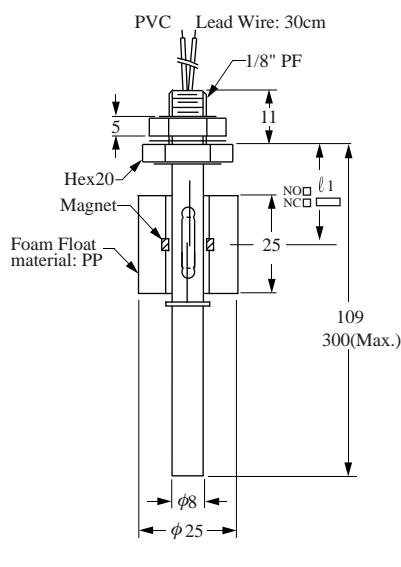

► FC PV2

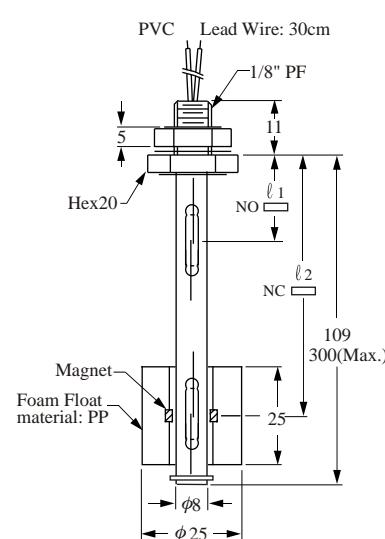

► FC PV3

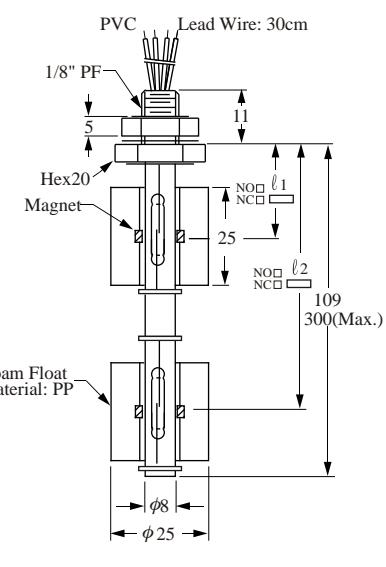

● NOTE: Float material can be optional.

Above items are done by custom-built when the standard specification is unable to be coped with their unique demand. There are with below special benefits:

- FCPV1 One float for one level activation switch location by custom-order.
- FCPV2 One float with 2 reed switches, applicable for high / low two level activation, especial design by one float to drive two contacts activation.
- FCPV3 Two floats drive with two independent reed switches, the compared difference with FCPV2 base on below character : Each one float unit can be performed by N.O. or N.C. level activation as per customer's option.

ORDER INFORMATION FOR PLASTIC SPECIAL TYPE

FC **P V 1** **2** **D** **A** (**0 5**) **P**)

Order No./ Model _____

PV1: RF-PV1 Vertical Mounting, Single Float Single Switch

PV2: RF-PV2 Vertical Mounting, Single Float Dual Switch

PV3: RF-PV3 Vertical Mounting, Dual Float Dual Switch

Material of Wetted parts _____

1: PP; Lead wire---PVC---Temp. 80°C

2: NBR (only float); Lead wire---PVC---Temp. 60°C
Lead wire---XLPE---Temp. 100°C

3: PVDF; Lead wire---XLPE---Temp. 125°C

4: Nylon; Lead wire---XLPE---Temp. 125°C
(Unsuitable for use in water application for long term)

Switching Capacity Max. _____

D: 50W 240Vac /200Vdc SPST 

F: 10W 125Vac SPST

K: 20W 150Vac/200Vdc SPDT

Contact Form _____

A: Normally Open (N.O.) SPST

B: Normally Close (N.C.) SPST

C: SPDT

F: 1 float 2 points.

H: 1-N.O.,1-N.C.(2 floats)

Lead wire Length (Unit=10cm) _____

05: 50cm (01~50) ※ 50cm per Unit

10: 100cm (51~100) ※ 30cm (Standard length)

15: 150cm (101~150)

⋮

Material of Lead wire _____



C: PVC cable (80°C) ---- AWG22 X φ4

P: PVC (80°C) ---- AWG22 (Standard)


X: XLPE (125°C) ---- AWG22

METAL TYPES


► FD 30□1/ FD 35□1

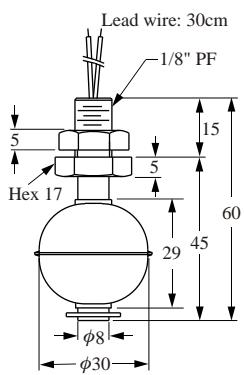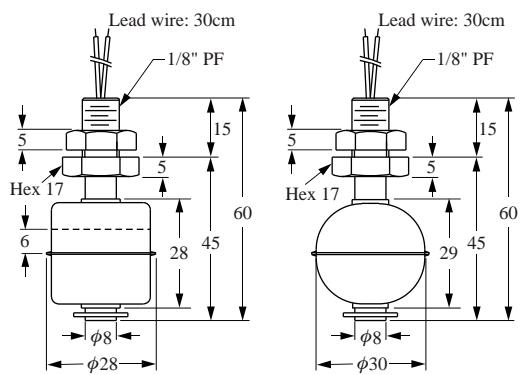


► FD 40□1

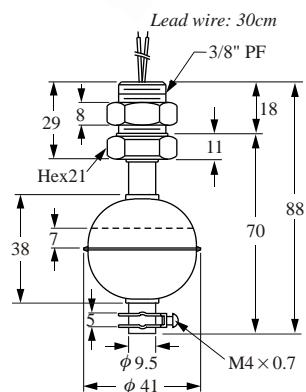


► FD 45□1

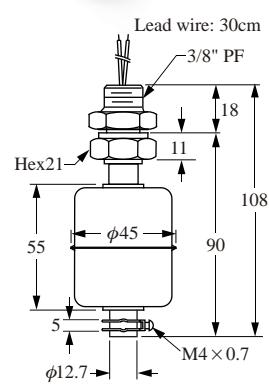


► FD 30□2

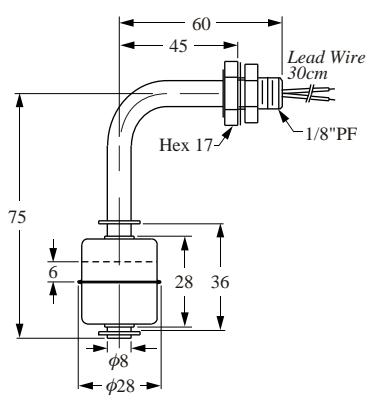

► FD 40□2

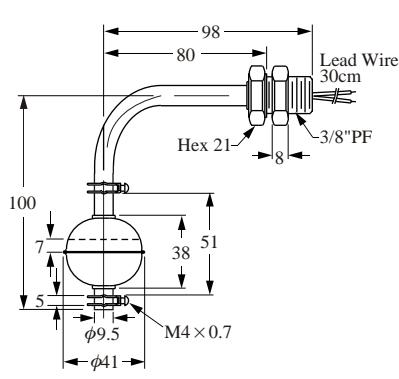


► FD 45□2

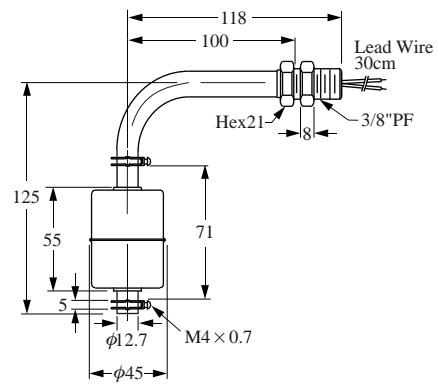


METAL TYPES


► FD 50□1

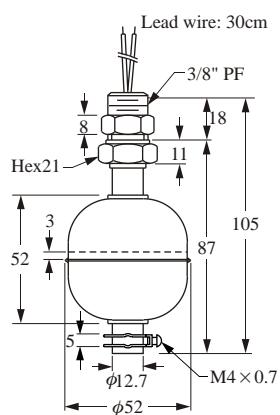

► FD 50□2

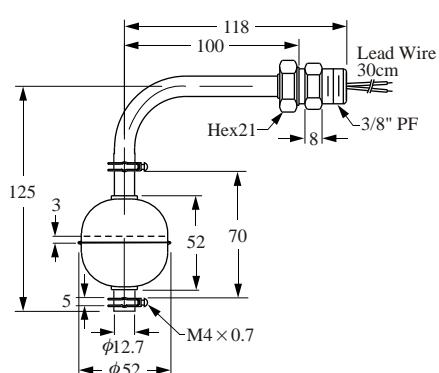

► FD 75□1

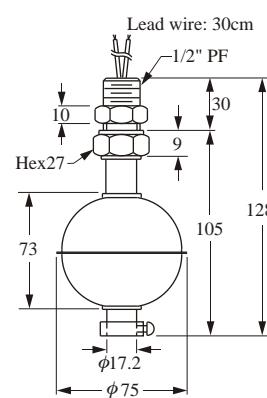

■ SPECIFICATIONS

Type Description	FD30□1D FD30□2D	FD40□1D FD40□2D	FD45□1D FD45□2D	FD50□1D FD50□2D	FD75□1G	FD10□1G
Switching Capacity Max.	50W SPST	50W SPST	50W SPST	50W SPST	60W SPDT	
Switching Voltage Max.	240Vac/200Vdc				220Vac	
Switching Current Max. (A)	0.5A	0.5A	0.5A	0.5A	2A	
Carry Current Max. (A)	1A	1A	1A	1A	3A	
Lead Wire	XLPE (UL3266, AWG22)					
Reversible Switch Action	YES	YES	YES	YES	NO	NO
Max. Pressure (Kg/cm²)	10	30	12	30	30	10
Operating Temperature	-20~120°C (OPTION 200°C)					
Material	Stainless Steel SUS304, 316					
Suitable Specific Gravity	0.8	0.7	0.65	0.55	0.55	0.5

ORDER INFORMATION FOR METAL TYPE

FD **30** **6** **2** **D** **A** (**10**)

Order No./ Model _____

- FD10** Float : RF-10 ϕ 75x108, Screw : 1/2"PF
- FD30** Float : RF-30 ϕ 28x28, Screw : 1/8"PF
- FD35** Float : RF-35 ϕ 30x29, Screw : 1/8"PF
- FD40** Float : RF-40 ϕ 41x38, Screw : 3/8"PF
- FD45** Float : RF-45 ϕ 45x55, Screw : 3/8"PF
- FD50** Float : RF-50 ϕ 52x52, Screw : 3/8"PF
- FD75** Float : RF-75 ϕ 75x70, Screw : 1/2"PF

Material of Wetted parts _____

- 0** : SUS304
- 6** : SUS316

Mounting _____

- 1** : Top or Bottom Mounting
- 2** : Side Mounting

Switching Capacity Max. _____

- D**: 50W 240Vac /200Vdc SPST 
- F**: 10W 125Vac SPST
- G**: 60W 220Vac SPDT (only use for tude $\geq \phi$ 12.7)
- S**: Others

Contact Form _____

- A**: Normal Open (N.O.) SPST ※ High Temp only available for A or B Type
- B**: Normal Close (N.C.) SPST
- C**: 1C SPDT
- D**: N.C. Reversible
- E**: N.O. Reversible

Lead wire Length (Unit=10cm) _____

- 05**: 50cm (01~50) ※ 50cm per Unit
- 10**: 100cm (51~100) ※ 30cm (Standard length)
- 15**: 150cm (101~150)
- ⋮

Material of Lead wire _____

- B**: PVC(80BC) ---- AWG24
- C**: PVC cable (80°C) ---- AWG22 X ϕ 4
- D**: XLPVC (105°C) ---- AWG22
- F**: SILICON cable (200°C) ---- AWG24X ϕ 4
- P**: PVC (80°C) ---- AWG22
- T**: TEFLON (200°C) ---- AWG24
- X**: XLPE (125°C) ---- AWG22 (Standard)


METAL SPECIAL TYPES

Below items are custom-built subject to special application place and existed equipment facilities. Their unique characters as follow:


- Any size measuring range, but $\phi 8\text{mm}$ stem Max. 500mm.

- Customized mounting thread specification are acceptable.
- Single or multiple contact form (point) are workable.
- Switch activation N.O. or N.C. are available.


► FDSA□11

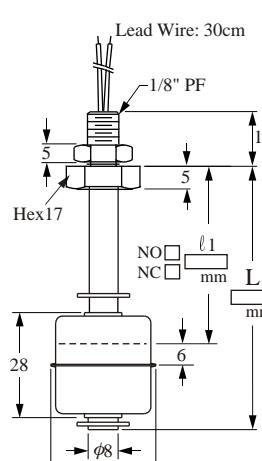


► FDSB□11

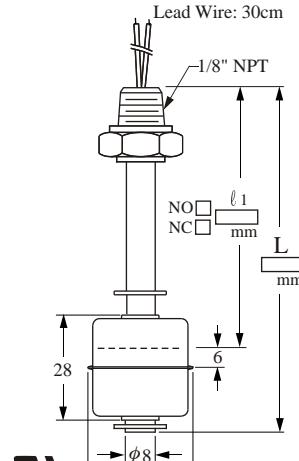


► FDSC□11

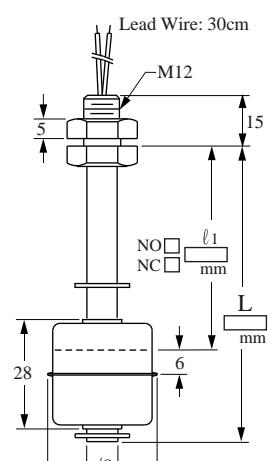


► FDSA□12

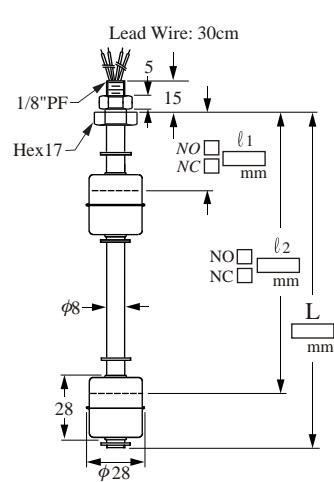

► FDSA□21

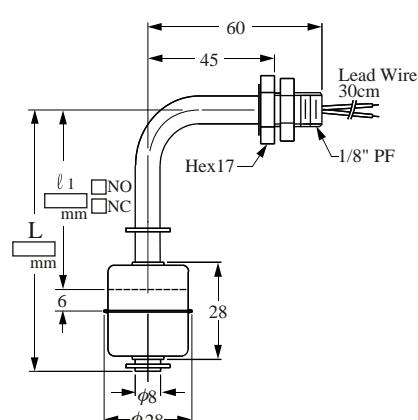

► FDSA□22

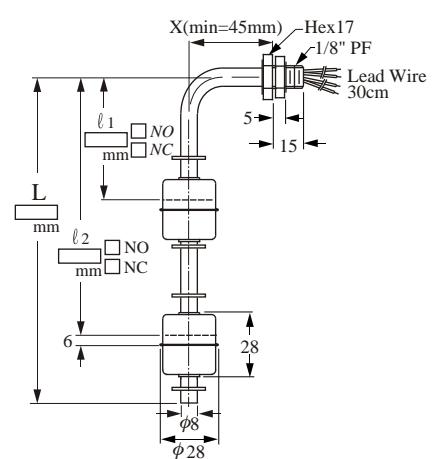


METAL SPECIAL TYPES

Below items are custom-built subject to special application place and existed equipment facilities. Their unique characters as follow:

- Any size measuring range.


- Customized mounting thread specification are acceptable.
- Single or multiple contact form (point) are workable.
- Switch activation N.O. or N.C. are available.

► FDSD□11

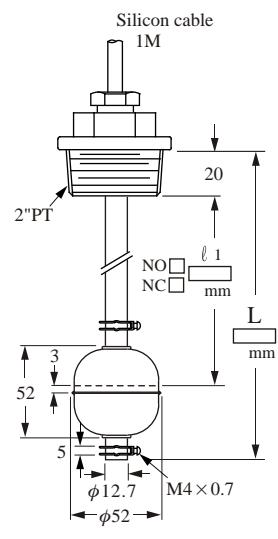


Washer: NBR

► FDSE□11

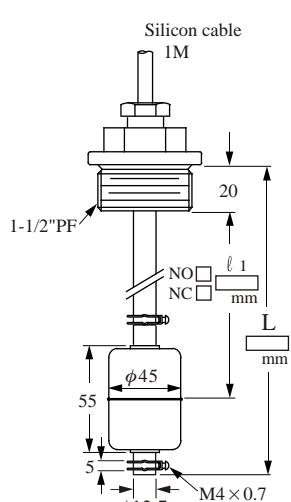


Washer: NBR

► FDSF□11

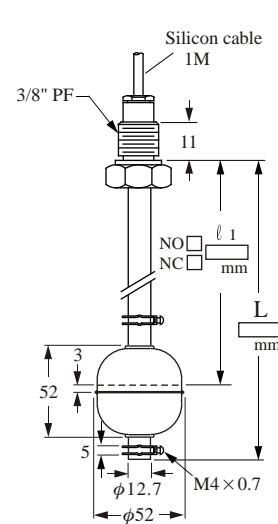


Washer: NBR

► FD4503D

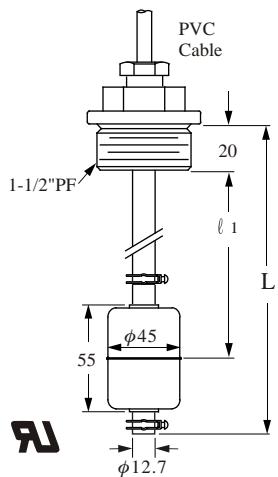


Washer: NBR

► FD5003G

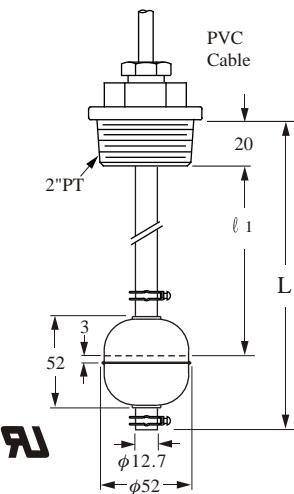

Washer: NBR

► FD7503G

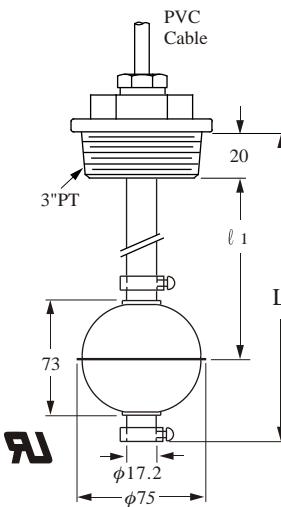

Washer: NBR

ORDER INFORMATION FOR METAL SPECIAL TYPE

FD **S A** **6** **1** **2** **D** **A** **0 5**

Type _____

FDSA Float : RF-SA ϕ 28x28, Screw : 1/8"PF

FDSB Float : RF-SB ϕ 28x28, Screw : 1/8"NPT

FDSC Float : RF-SC ϕ 28x28, Screw : M12

FDSD Float : RF-SD ϕ 52x52, Screw : 2"PT

FDSE Float : RF-SE ϕ 45x55, Screw : 1-1/2"PF

FDSF Float : RF-SF ϕ 52x52, Screw : 3/8"PF

Material of Wetted parts _____

0 : SUS304

6 : SUS316

Mounting _____

1 : Top or Bottom Mounting

2 : Side Mounting

Float Number _____

1~4 floats

Switching Capacity Max. _____

D: 50W 240Vac /200Vdc, SPST 

G: 60W 220Vac, SPDT (only use for tube $\geq \phi$ 12.7)

K: 20W 150Vac /200Vdc, SPDT

Contact Form _____

A: Normal Open (N.O.) SPST F: 1 float 2 points

B: Normal Close (N.C.) SPST H: 1-N.O.,1-N.C.(2 floats)

C: 1AB SPDT

Lead wire Length (Unit=10cm) _____

03: 30cm (SA, SB, SC, Standard length) \approx 50cm per Unit

05: 50cm (01~50)

10: 100cm (SD, SE, SF, Standard length)

15: 150cm (101~150)

Material of Lead wire _____

C: PVC cable (80°C) ---- AWG22 X 2C X ϕ 4

F: SILICON cable (200°C) ---- AWG24X 2C X ϕ 4



P: PVC (80°C) ---- AWG22

T: TEFLON (200°C) ---- AWG24 For SA, SB, SC Type



X: XLPE (125°C) ---- AWG22 (Standard)

TYPICAL WIRING DIAGRAMS



* AUTO SUPPLY CASE:
SINGLE FLOAT DUAL SWITCHES

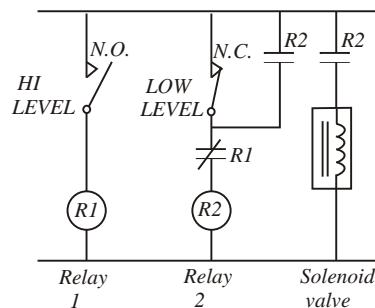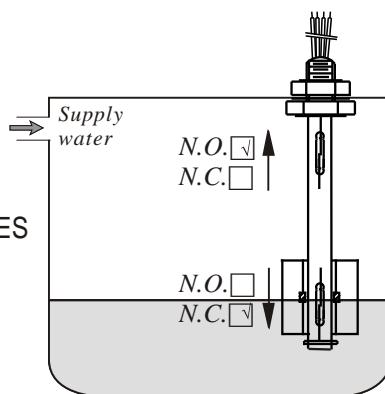

* AUTO DRAIN CASE:
SINGLE FLOAT DUAL SWITCHES

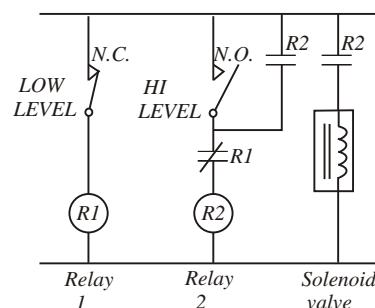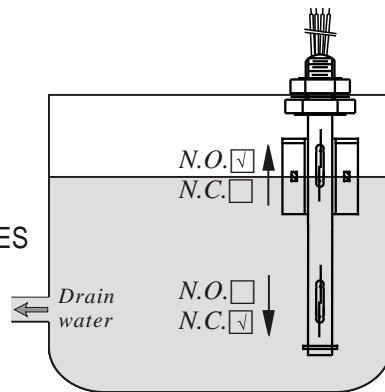

* AUTO SUPPLY CASE:
DUAL FLOATS DUAL SWITCHES

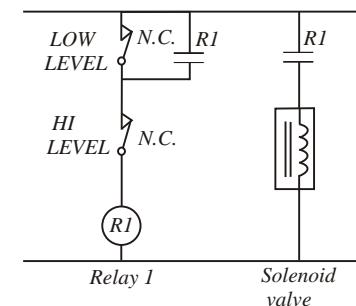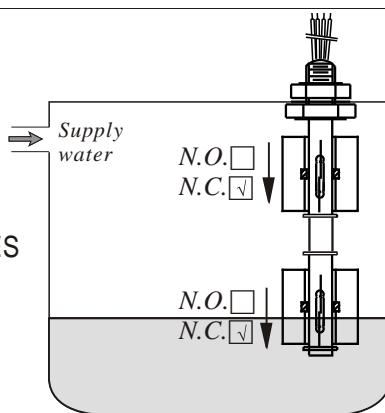

* AUTO DRAIN CASE:
DUAL FLOATS DUAL SWITCHES

